

Orbital Truss Kiosk 06

OR-KIOSK-06

Orbital Express™ Truss Kiosks are the perfect way to display media and/or literature at any trade show, event, retail or corporate space. Kiosks complement the Orbital Truss Express line of 10', 20' and 20' x 20' displays. Monitors not included. Kiosk table tops and bases available in choice of four thermoformed finishes.



features and benefits:

- Finished Base
- Magnet mounted graphic
- OCH2 molded case
- Small monitor bracket: Holds sizes 12" - 23"
- Max weight: 10 lbs / 4.5 kg
- 5 year warranty against manufacturer defects


dimensions:

Hardware	Graphic
<p>Assembled unit: 24" w x 56" h x 34" d 610mm(w) x 1422mm(h) x 864mm(d)</p> <p>Approximate weight with cases: 44 lbs / 20 kg</p>	<p>Refer to related graphic template for more information.</p> <p>Visit: www.exhibitors-handbook.com/graphic-templates</p>
Shipping	additional information:
<p>Packing case(s): 1 OCH2</p> <p>Shipping dimensions: 52" l x 29" h x 15" d 1321mm(l) x 737mm(h) x 381mm(d)</p> <p>Approximate total shipping weight (with case): 80 lbs / 36 kg</p>	<p>Graphic material: Dye-sublimated or UV Panels</p> <p>*Kit does not include monitors</p> <p>Tabletop Colors:</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  silver </div> <div style="text-align: center;">  black </div> <div style="text-align: center;">  mahogany </div> <div style="text-align: center;">  natural </div> </div> <p>2 person assembly recommended:</p> <div style="display: flex; justify-content: space-around;">   </div>


We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Included In Your Kit


Tools, Components, & Connectors

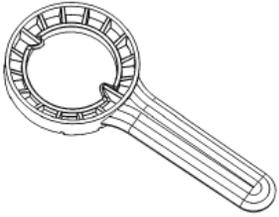


OR-TOOL-B x1

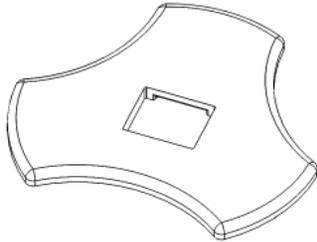


OR-B3-B x1

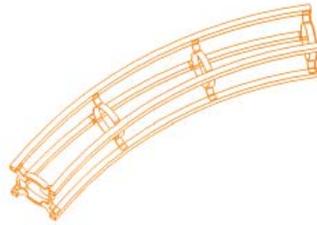


OR-45-CV-3 x1

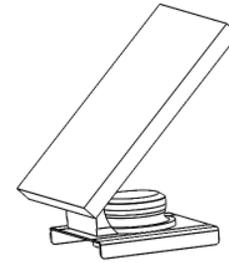


OR-MM-KIT x1

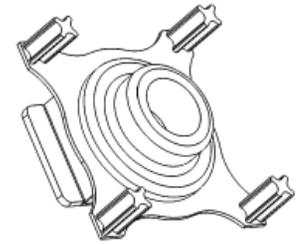


OR-UNC-QL x2

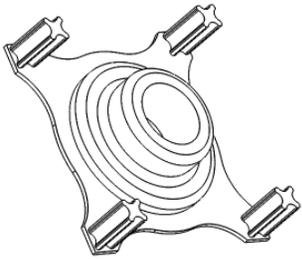


OR-QL-T2J x1

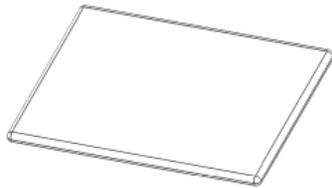

OR-ATL-CNTR-15-B x1

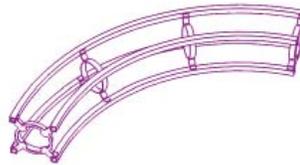

OR-90-CV-2 x1

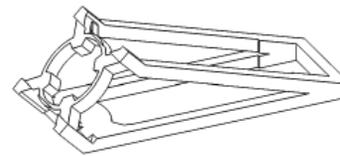

OR-B45 x1

Graphics



OR-KIOSK-06-A-DS / UV x1




OR-KIOSK-06-B-DS / UV x1

Graphics: -DS codes specify dye sublimation graphics. -UV codes specify ultra-violet graphics.

Exploded View


OR-KIOSK-06

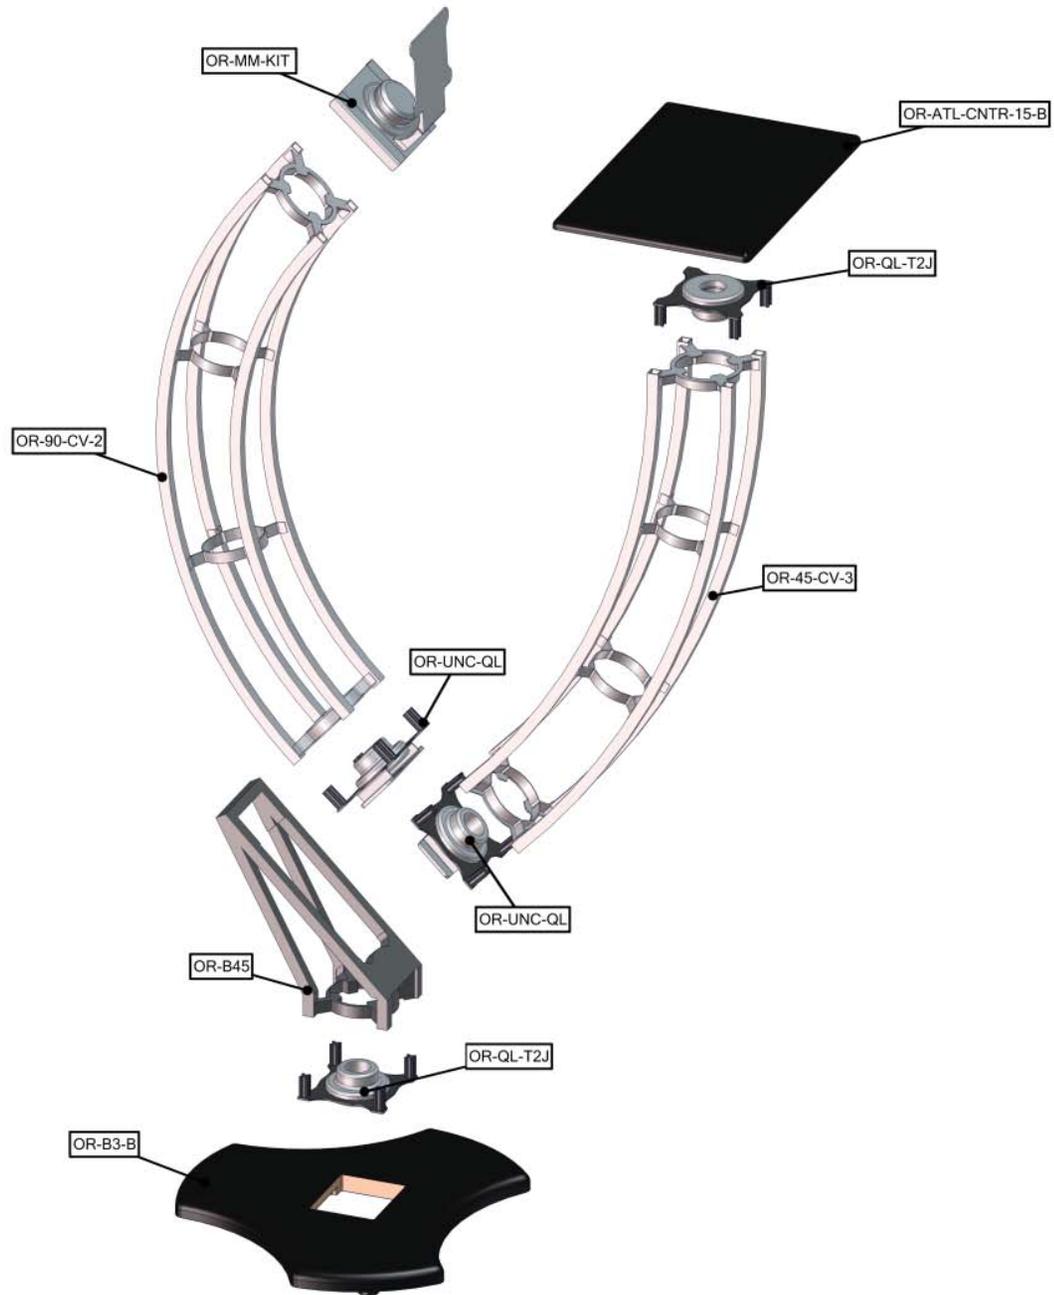

Connection Methods


Orbital Express Truss™ structures use a number of different yet simple connection methods. Your kit will include one or more of the connection methods shown below. Steps within the Kit Assembly will reference a specific method for each connection point.

Connection Method 1: Truss To Junction Box (OR-QL-T2J)

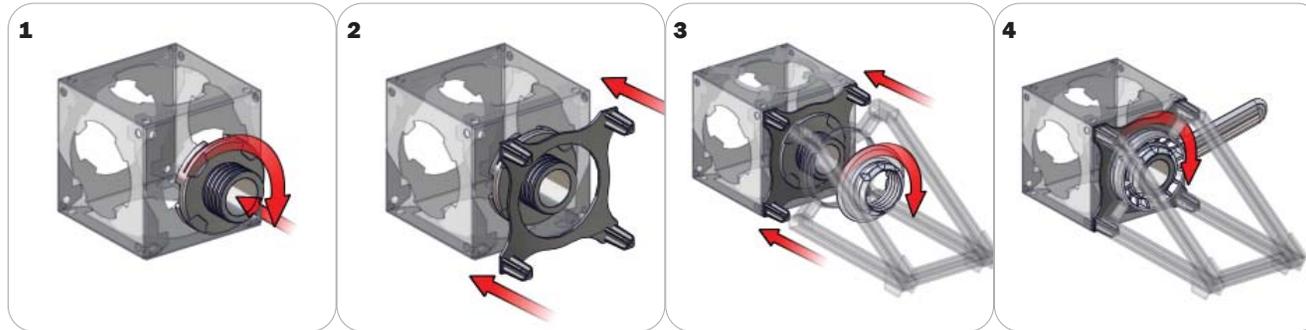


With your OR-QL-T2J (T2J) connector disassembled, insert the twist-lock hub of the connector into any large hole of the junction box and turn clockwise to lock into place (as shown in step 1). Place the bracket over the locked portion of the T2J connector so that the protruding hubs face outward (as shown in step 2). Push the truss you wish to connect onto the hubs of the T2J bracket. The hubs will slide into the holes in the end of the truss. Hand tighten the remaining cap onto the T2J connector and lock tight and securely using your OR-TOOL-B tool.

Connection Method 2: Truss To Truss (OR-QL-T2T)

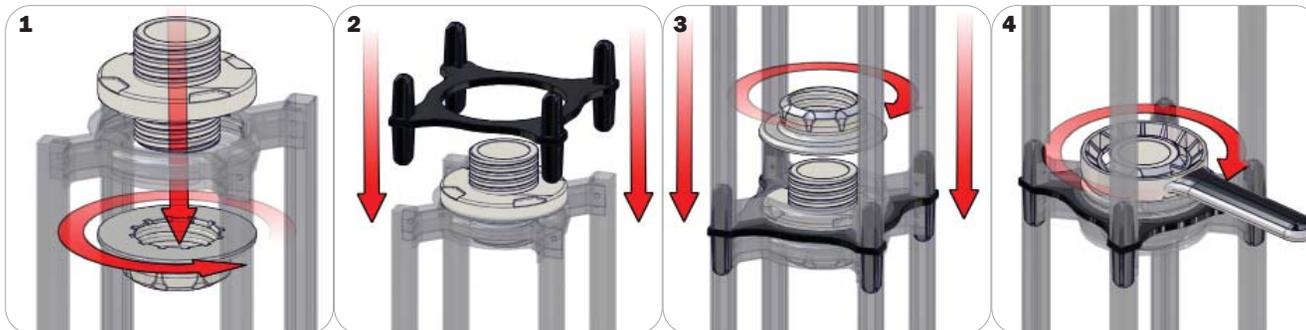

With your OR-QL-T2T (T2T) connector disassembled, assemble onto the end of your truss with the double-sided screw hub and a screw cap, then tighten with your OR-TOOL-B tool (as shown in step 1). Locate the bracket for your T2T connector. Insert the hubs of the bracket into the holes on the end of your truss. Add the truss you wish to connect by inserting the hubs of the bracket onto the second truss. Sandwich the end of the truss using the second screw cap and lock tight and securely using your OR-TOOL-B tool.

Connection Method 3: Universal Connector (OR-UNC-QL) / Accessories

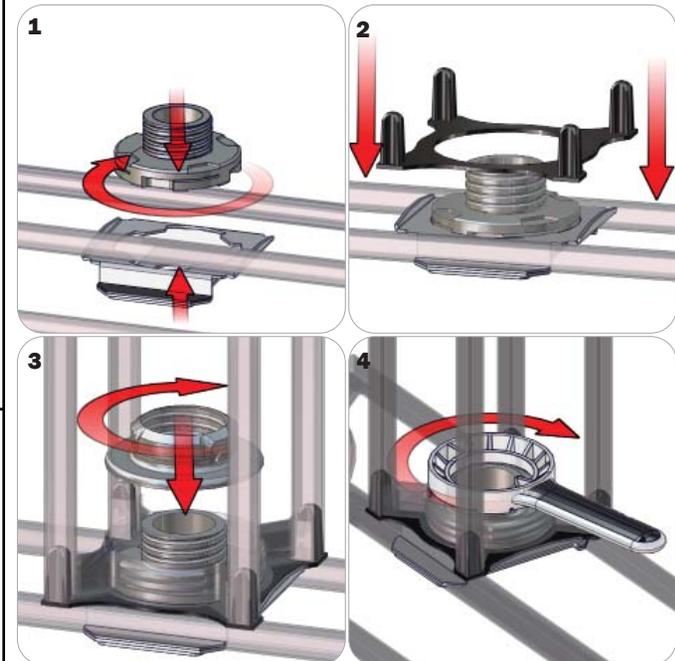

With your OR-UNC-QL (UNC) connector disassembled, assemble onto the end of the truss using the metal bracket and the screw hub. Turn clockwise to lock the bracket and twist-locking hub together. Add the plastic hub over the locked pieces so that the protruding hubs point away and the bracket sits flush. Push the truss you wish to connect onto the bracket, letting the hubs insert into the holes of the truss. Hand tighten the remaining cap onto the T2J connector and lock tight and securely using your OR-TOOL-B tool.

Kit Assembly

Step by Step

Step 1.

Attach your OR-B45 to your base. Be sure to lock the OR-B45 into the base in the correct orientation.

Please reference Connection Method 1 for more details.



Step 2.

Lock the truss to your OR-B45. Also lock your OR-MM-KIT into place.

Please reference Connection Methods 1 & 3 for more details.



Step 3.

Lock your OR-ATL-CTR-15 counter top to the T2J connector on the lower truss.



Step 3.

If your kit features "Dye Sublimation" fabric graphics, apply the hook velcro around the inside perimeter of the truss you wish to apply your graphic to. Apply the graphic utilizing the pre-sewn loop velcro on its unprinted side.

If your kit features "UV panel" graphics, simply attach the graphic to the truss utilizing the pre-applied magnets.

