



Coyote Tower

COY-3-G-TOW

The Coyote Tower combines strength, reliability and style in a lightweight and easy to use system. It is easy to assemble and disassemble and it takes up very little room. The graphic wraps all the way around giving you 360 degrees of visibility.

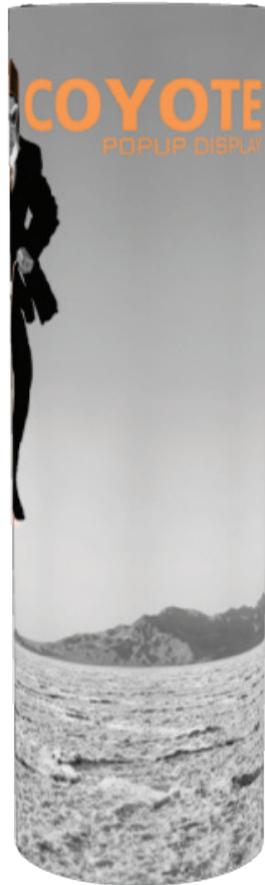

features and benefits:

- Sturdy frame
- Quick to set up
- Easy to store and ship
- 360 degrees of visibility
- Takes up very little space in booth
- Collapses to a fraction of its size
- LED lighting available
- Optional molded case for easy transportation
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit:
87.5" h x 25.3" d
2222.5mm(h) x 643mm(d)

Weight:
18 lbs / 8.2 kg

Shipping

Shipping dimensions:
33" l x 9" w x 7" h
838mm(l) x 229mm(w) x 178mm(h)

Shipping weight:
22 lbs / 10 kg

Graphic

Refer to related graphic template for more information.

Visit:
www.exhibitors-handbook.com/graphic-templates

additional information:

Recommended material:
Opaque PVC, Translucent PVC
*Must use non dye sub graphics


Optional cases: OCS, OCL

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Frame Set-up




Unpack the frame. 1




Slowly pull upward on the frame to extend it. 2




Stand frame upright. 3




Lock branches together in a circle using the grey hooks. 4

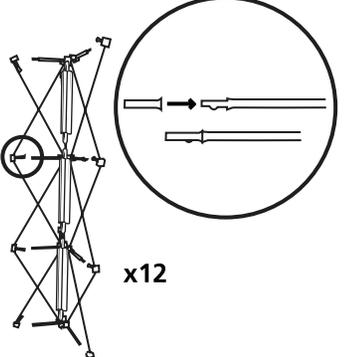

x12
Push together all locking arms. 5




Continue placing channel bars around frame; slide into triangular groove to secure. 6

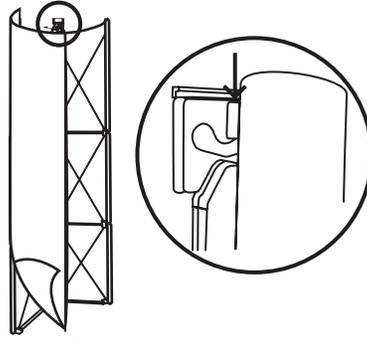

Use hook on panel and magnetic strip to secure graphic. 7



Continue to secure panels to magnetic strips, hanging evenly. 8



Repeat process until all graphic panels are secured. 9



Unit is complete. 10