Flat Suspended Signs

FLAT-SUSP Series

The FLAT-SUSP Series combines sets of back-to-back extrusion for elegant, effective signage and comes in a variety of standard formats. Available in anodized silver or powder-coated black finish. Clear, non-glare lenses are optional and custom sizes are offered to meet your specifications.









- Double-sided landscape frames
- Available in anodized silver or black
- Option of round or square profile
- Choice of black or grey end caps
- Standard with clear non-glare lens and suction cup for quick, graphic changes-No assembly required
- Custom sizes available
- Quick shipping

dimensions:

Hardware

Assembled unit:

- Custom sizes available
- All lengths measurements (as shown on following page) apply to the extrusion only and exclude the end caps

additional information:

Graphic material:

Frames can accommodate a multitude of sign substrates from printed paper inserts, laminated printed, cut vinyl, etc. Your sign professional will help you find the material that's right for your project.


Shipping

Shipping weights and dimensions vary depending on the quantity of product ordered. Contact your dealer for your specific weights and dimensions.




We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Mounting Instructions

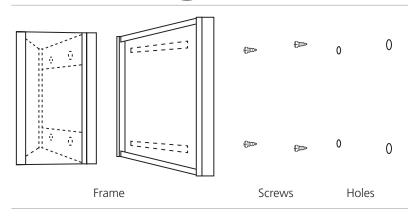


Direct to Wall FLAT-WP FLAT-PJT FLAT-DIRP FLAT-DIRM

- **Step 1.** Set frame on wall in desired location.
- **Step 2.** Mark holes, remove frame, and drill holes.
- **Step 3.** Place anchors in drilled holes, screws in anchors, then screw into wall.
- **Step 4.** Mount frame by lining channel bars with screws.



Bracket to Wall FLAT-PJL FLAT-PJP

- **Step 1.** Set bracket on wall in desired location.
- **Step 2.** Mark holes, remove bracket, and drill holes.
- **Step 3.** Place anchors in drilled holes, then return bracket to wall.
- **Step 4.** Place screws through bracket face and screw into anchors.
- **Step 5.** Apply nut caps.



Suspend FLAT-SUSP

- **Step 1.** Install mounts (not included) on ceiling in desired location.
- **Step 2.** Attach cables (not included) to mounts and frame rings.

Mounting Tape

- **Step 1.** Remove paper cover from tape.
- **Step 2.** Apply frame to wall in desired location.